


## SPECIALTY SUPPORTS POLYTIER SUPPORTS

Polytier supports provide installation for two tiers of conveyor. Additional cross pipes are available for multi-tier (three or more tier) installation.

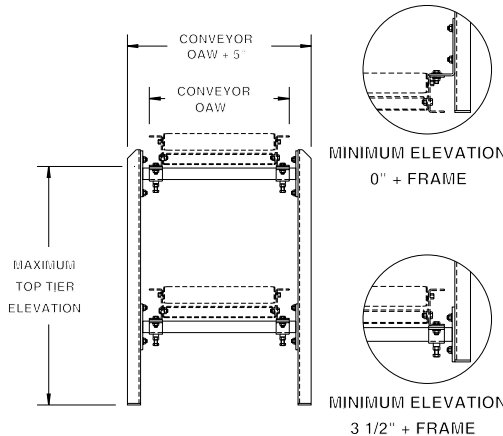

### POLYTIER SUPPORTS MODEL NUMBER PSM-6-43

PS (light or medium duty\*)-(elevation code)-(between frames\*\*)

\*Specify L for light duty or M for medium duty.

\*\*Specify 12", 18" or 24" OAW for model PSL, available for 12", 18" and 24" OAW conveyors only and is suited specifically for wheel conveyors and 138 gravity series.

### MINIMUM ELEVATION POLYTIER SUPPORTS PSM-6-0-43

PS (light or medium duty\*)-(elevation code)-0-(between frames\*\*)

\*Specify L for light duty or M for medium duty.

\*\*Specify 12", 18" or 24" OAW for model PSL, available for 12", 18" and 24" OAW conveyors only and is suited specifically for wheel conveyors and 138 gravity series.

### SPECIFICATIONS

**CONSTRUCTION:** Upright legs 7 ga. channel construction; attachment "hat" brackets 7 ga.; cross pipes 1" inside dia.

**CAPACITY:** 1250 lbs. per cross member. Capacity per set of legs is 2500 lbs (including conveyor and product weight).


**KNEE BRACES:** One pair per set of legs.

ELEVATION CODE	MAX. TOP TIER ELEV.	ELEVATION CODE	MAX. TOP TIER ELEV.
1	20-1/2"	9	68-1/2"
2	26-1/2"	10	74-1/2"
3	32-1/2"	11	80-1/2"
4	38-1/2"	12	86-1/2"
5	44-1/2"	13	92-1/2"
6	50-1/2"	14	98-1/2"
7	56-1/2"	15	104-1/2"
8	62-1/2"		

**WIDTHS:** 24 hour shipments include 13", 15", 17", 19", 21", 23", 25", 27", 31", 33", 37", 39", 43", 45", 47" and 51" BF.

■ 24 hour shipment

## CEILING HANGERS

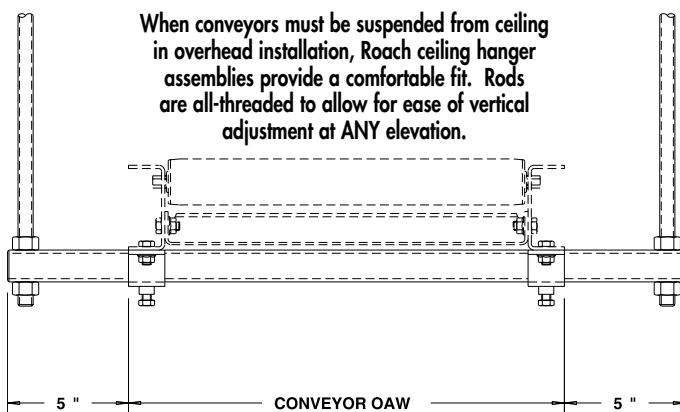

### CEILING HANGERS MODEL NO. (LIGHT DUTY) CHL-18

CHL-(overall width\*)

\*Specify 12", 18" or 24" overall width ONLY.

### CEILING HANGERS MODEL NO. (MED. DUTY) CHM-21

CHM-(between frames)

NOTE: If attaching to powered conveyor, specify model number for proper allocation of spacer channels, if required. Ceiling hangers for 24 hour shipment are designed for light & medium duty applications (14, 12 and 10 ga. frames). For heavy duty applications (not included in 24 hour shipments), consult factory for pricing & availability.

### SPECIFICATIONS

**HANGERS:** (2) 7' long threaded rods (5/8" dia. - 11 UNC) provide nom. 6' product clearance.

**MOUNTING BRACKETS:** Cross-pipe to span underneath conveyor is painted 1" I.D. steel pipe; Retainer or "Hat" brackets bolt to lower flange of conveyor frame are 7 ga.

**WIDTHS:** 24 hour shipments include 13", 15", 17", 19", 21", 23", 25", 27", 31", 33", 37", 39", 43", 45", 47" and 51" BF.

■ 24 hour shipment

