

GRAVITY CONVEYORS

RAIL WHEEL CONVEYORS


24 HOUR SHIPMENTS INCLUDE ALL 1-FOOT INCREMENTS 1'-0" TO 10'-0" ON RAIL WHEELS

SPECIFY MODEL NUMBER PER EXAMPLE

RA-4


R(rail wheel configuration*)-(length)

*Specify RA, RC, RD, RJ or RU.

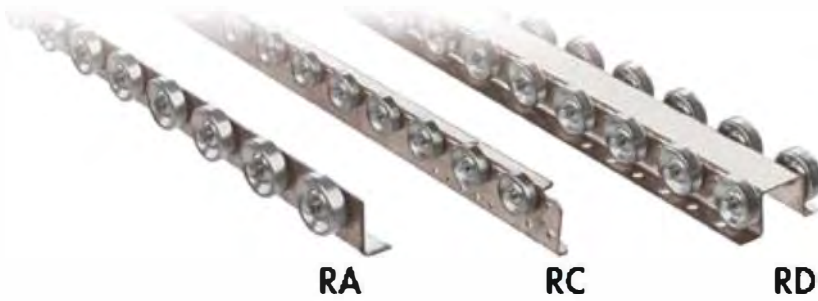

For replacement wheels, refer to part #BRW04600

Rail wheel conveyors are commonly floor or rack mounted to convey unit loads utilizing an arrangement of two or more rail conveyors mounted parallel. Rail wheel conveyors are lightweight, economical and ship in 24 hours.

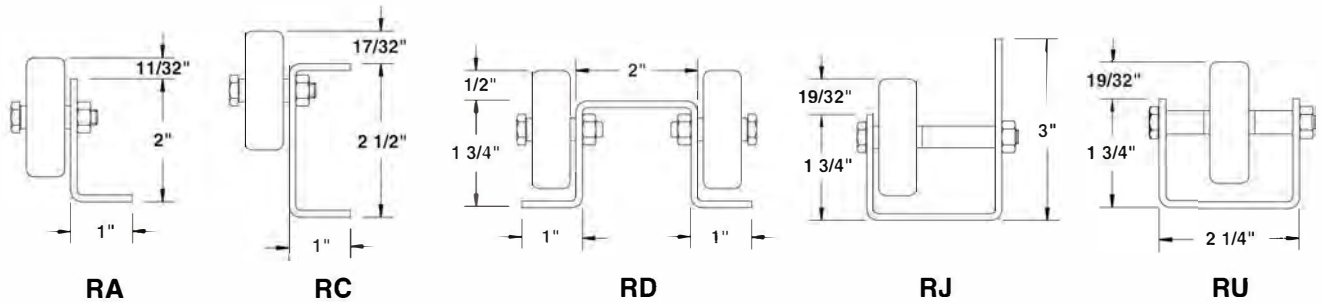

SPECIFICATIONS

RAILS: 12 ga. galvanized steel rails are formed to several different configurations, including RA, RC, RD, RJ, and RU rail wheel conveyors.

WHEELS: 1-15/16" dia. prelubricated ball bearing wheel with hardened raceway, zinc plated, 50 lb. capacity.

AXLES: 1/4" dia. galvanized steel bolt-type with lock nut.

LENGTHS: Available in 1'-0" increments from 1'-0" to 10'-0".

COUPLINGS: Not supplied, specify type required for pricing.

WHEEL CENTERS: 3" centers typical on all patterns.



TECHNICAL DATA

MODEL	Weights Per FT. (lbs.)	Weights Per 10' (lbs.)	Max. Frame Capacity per FT. (lbs.) 5' Support Center	Max. Frame Capacity per FT. (lbs.) 10' Support Center
RA	1.7	17	50	6
RC	2.2	22	146	18
RD	3.8	38	125	15
RJ	3.1	31	198	24
RU	2.7	27	113	14

Roach Conveyors- Thomas Conveyor and Equipment
28 Hillside Avenue- Hillside- IL- 60162- www.tceconveyors.com

THOMAS CONVEYOR
and Equipment Company, Inc.
28 Hillside Avenue • Hillside, IL 60162-0739

■ 24 hour shipment