


CEILING HANGERS

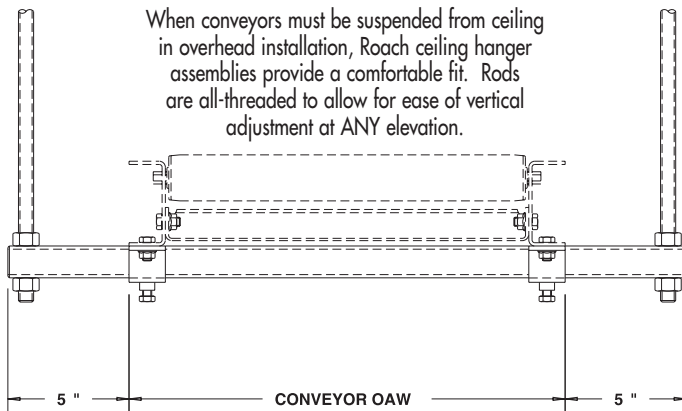

SPECIFICATIONS

HANGERS: (2) 7' long threaded rods (5/8" dia. - 11 UNC) provide nom. 6' product clearance.

MOUNTING BRACKETS: Cross-pipe to span underneath conveyor is painted 1" I.D. steel pipe; Retainer or "Hat" brackets bolt to lower flange of conveyor frame are 7 ga.

WIDTHS: 24 hour shipments include 13", 15", 17", 19", 21", 23", 25", 27", 31", 33", 37", 39", 43", 45", 47" and 51" BF.

CEILING HANGERS MODEL NO. (LIGHT DUTY)
 CHL-18
 CHL-(overall width*)
 *Specify 12", 18" or 24" overall width ONLY.

CEILING HANGERS MODEL NO. (MED. DUTY)
 CHM-21
 CHM-(between frames)

NOTE: If attaching to powered conveyor, specify model number for proper allocation of spacer channels, if required. Ceiling hangers for 24 hour shipment are designed for light & medium duty applications (14, 12 and 10 ga. frames). For heavy duty applications (not included in 24 hour shipments), consult factory for pricing & availability.

■ 24 hour shipment