
POWER ACCESSORIES TURNING WHEEL/TURNING POST ASSEMBLY

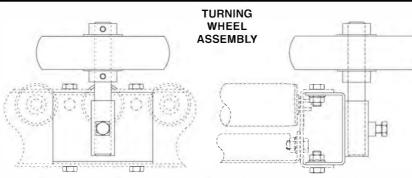

Turning wheel and turning post assemblies (turning post shown lower right) are commonly used in applications with converging or diverging spurs. These simple transition devices assist products with smooth transition to or from spur line.

SPECIFICATIONS

TW: 6" dia. x 1-1/2" wide face rubber wheel with 3/4'' dia, bore; shaft is 3/4'' dia. w/ locking collar positioned above and below wheel. Shaft adjusts vertically up/down to accommodate product height.

TP: 196S roller (medium duty) or 251S roller (heavy duty), both 6" BF mounted in 7 ga. frame assembly.

MOTOR DRIVE ASSEMBLY

This is a complete 1/3 HP drive featuring Baldor motor and Boston reducer including motor, reducer, reducer mounting plate ("motor base No. 50 roller drive chain, chain guard with cover and two drive sprockets. Specify conveyor that drive mounts to for proper allocation of drive

SPECIFICATIONS

MOTOR: Baldor 1/3 HP, 230/460/3, 60 cycle, ODP.


REDUCER: Boston, 30:1 ratio, right angle.

MOTOR BASE: Underneath mount with push plate for chain take-up.

SPEED: 60 FPM, constant.

SPECIFY MODEL NUMBER PER EXAMPLE TW-3.5

T(wheel or post*)-(frame depth or roller size**) *Specify W for turning wheel or P for turning post. **For turning wheel specify frame size as 2.5, 3.5, 4.5 or 7. For turning post, indicate roller type as either 196 or 251. NOTE: TW is 24 hour shipment; TP is 2 week shipment.



24 hour shipment 2 week shipment

SPECIFY MODEL NUMBER PER EXAMPLE MDA-1/3-21-60 MDA-(horsepower)-(between frames*)-(speed)

*Conveyor model number and BF must be indicated for proper allocation of drive components

Toll Free 844-220-0086 Roach Conveyors- Thomas Conveyor and Equipment 28 Hillside Avenue- Hillside- IL- 60162- www.tceconveyors.com **THOMAS CONVEYOR**

110