

# LIFT-O-FLEX



Lifter with Telescopic Mast and Squeeze-O-Turn™



Lifter Shown with Forward Drum Tipper


The 19500S (Auxiliary Non-Powered Mast) Series LIFT-O-FLEX® ergonomic lifter offers dynamic load handling characteristics for heavy load capacities. The 19500S series has a lift capacity of 525-lbs. This product provides expanded flexibility in equipment selection to better fill your ergonomic lifting requirements.

The 19000 series lifters use many of the same basic lifter components. This allows for inter-changeability between lifters permitting the customer to satisfy ergonomic lifter requirements while maintaining the ability to adapt the lifter to meet the challenge of meeting tomorrow's lifter needs today without incurring the cost of complete replacement.

#### Features and Benefits:

- Anodized Aluminum Profiles-
  - Intermediate Sections-Standard and custom lengths
  - Dual Masts-One Power/One Non-Powered for increased stability at extended heights
- Steel (Powder Coated Paint-Optional SS)
  - Legs-Bolted to Intermediate
  - Handlebar-Height Adjustable
  - Power Pack Cover
- Standard and custom leg configurations and heights-Swivel and fixed casters-
- Standard and custom length lift masts
- Foot operated 3-position central brake system on rear casters
  - Brake, free-wheeling and center lock (trailing)
- Lift mast slip clutch on the down movement provides for safe load handling
- Current limiting (no limit switches) provide for load limiting and stops
- Totally enclosed lift mast w/ball screw for smooth up and down DC powered movement
- Electronic power pack can be provided with either standard or heavy-duty batteries
  - Power packs are also exchangeable allowing for multi-shift operation
- Detachable remote controller (Plug-in to Electronic Power Pack)
  - Provides the operator with control over load handling functions.
- Handlebar is adjustable by the operators to achieve ergonomic operation

**19500S (Auxiliary Non-Powered Mast) Series Ergonomic Lifter**

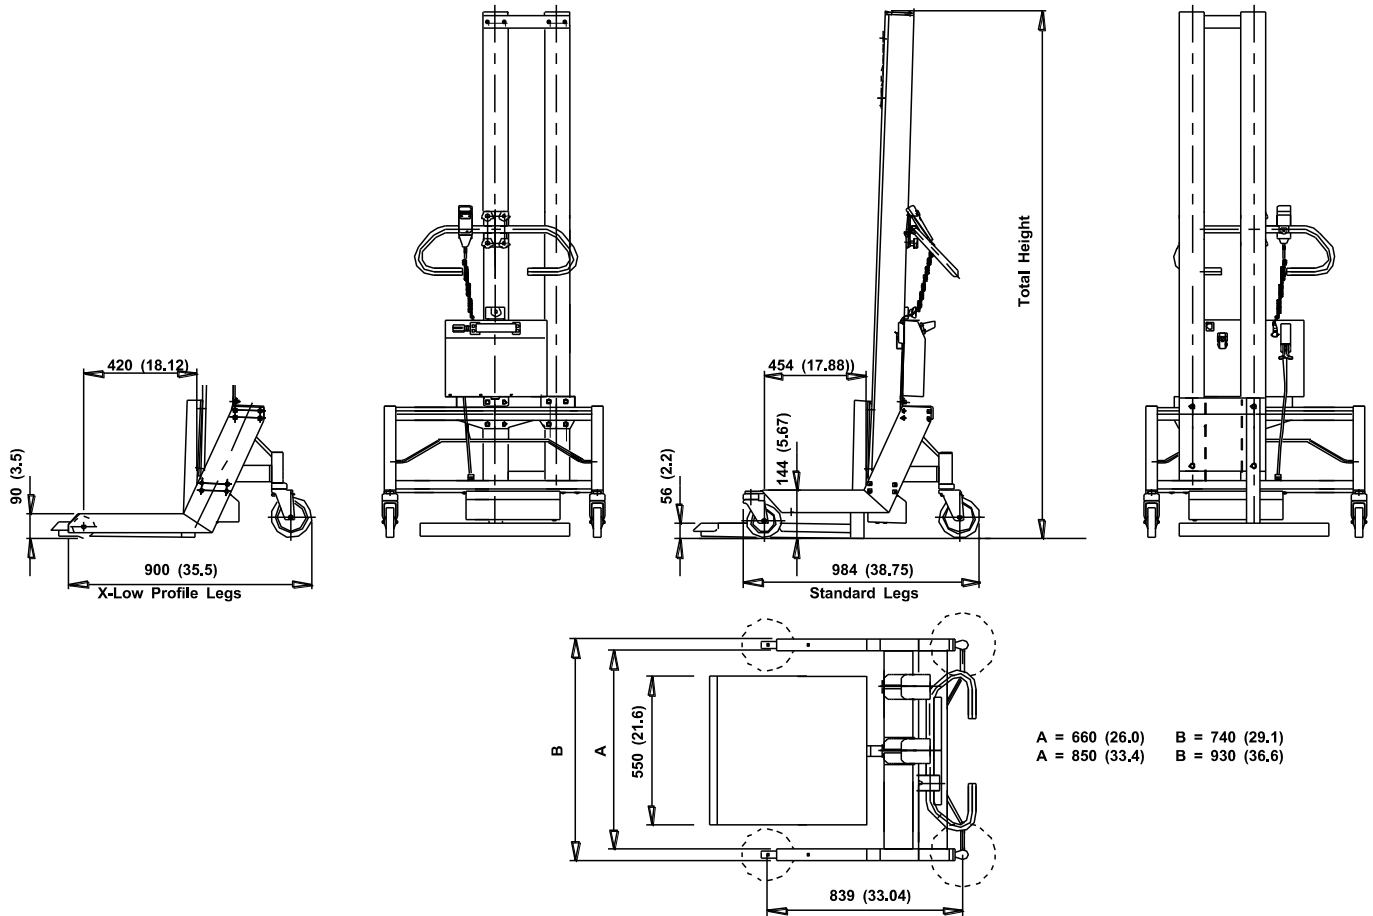

**NOTE: Custom Lift-O-Flex® solutions can be designed specifically for your application**

Technical Specifications 19500S (Slave Mast) Series			
Floor to top of Mast Standard Legs	Floor to top of Mast Low Profile Legs	Total Lift Stroke Standard Mast	Total Lift Stroke HD Mast
2003mm (78.8")	1951mm (76.8")	1375mm (54.1")	1262mm (49.7")
2503mm (98.5")	245mm (96.5")	1875mm (73.8")	1694mm (66.7")
3003mm (118.2")	2951mm (116.1")	2368mm (93.2")	2260mm (89")
Minimum Lift Height	~56mm (~2.2")		
Lift-Speed 19500 Series	~50mm/sec (2"/sec)		
Legs-Standard (Overall Length)	Std Length 984mm (38.75")-Long 1184mm (46.6")-X-Long 1384mm (54.5")		
Legs-X-Low Profile (Overall Length)	Std Length 900mm (35.4")-Long 1110mm (39.7")		
Wheel Material	Polyurethane/Rubber		
Wheel Diameter (Front/Back) Standard	100mm (3.9")/150mm (5.9")-Front Single Swivel		
Wheel Diameter (Front/Back) X-Low built	76mm (2.9")/150mm (5.9")-Front Fixed Castor		
Width: Outside	Std-850mm (33.5")		
Noise level	>70dB(A)		
Maximum Load 19500 Series	240Kg (525-lbs)		
Lifter Weight w/o End-Effector	~105Kg (230-lbs)		
Battery Type	Lead Gel Cell		
Battery Voltage	24V, 2 Amp		
Battery Capacity	7.2 AHr		
Recharge Time	6-8 Hours		
Lifter Finish	Powder Coated Paint/Anodized or Stainless Steel/Anodized		

Note: Equipment dimensions are subject to change without notice.

Rev 5/11