

15450 Summit Avenue
Suite 175
Oakbrook Terrace IL 60181
844-220-0086



JanTec

incorporated

partnered
with



Thomas
Conveyor &
Equipment Co.

PTM series



JanTec Belt Conveyor Power Turns are available in Standard, HD, and SP options, all in a wide range of widths and radii to fit every application.


Offering long life, flexibility, as well as rugged construction, they may be ordered to handle loads from a few pounds to extremely heavy loads per turn.

Drive pulleys are sized for the load. By driving through the entire width of the belt, not just the outside radius edge, heavy loads may be transported smoothly and efficiently. The guide system is designed with sealed ball bearings for long life in abrasive environments. **No roller chains or sprockets are required.** Speeds up to 600 fpm at centerline can be provided.

SP (Small Pulley)

When handling small dimensional products, SP turns can be furnished with smaller standard pulley assemblies located at each end of the turn. The pulley diameters for this series are determined on an individual basis requiring complete information on product size.

For full application and general dimensional information, visit our website or contact our office.

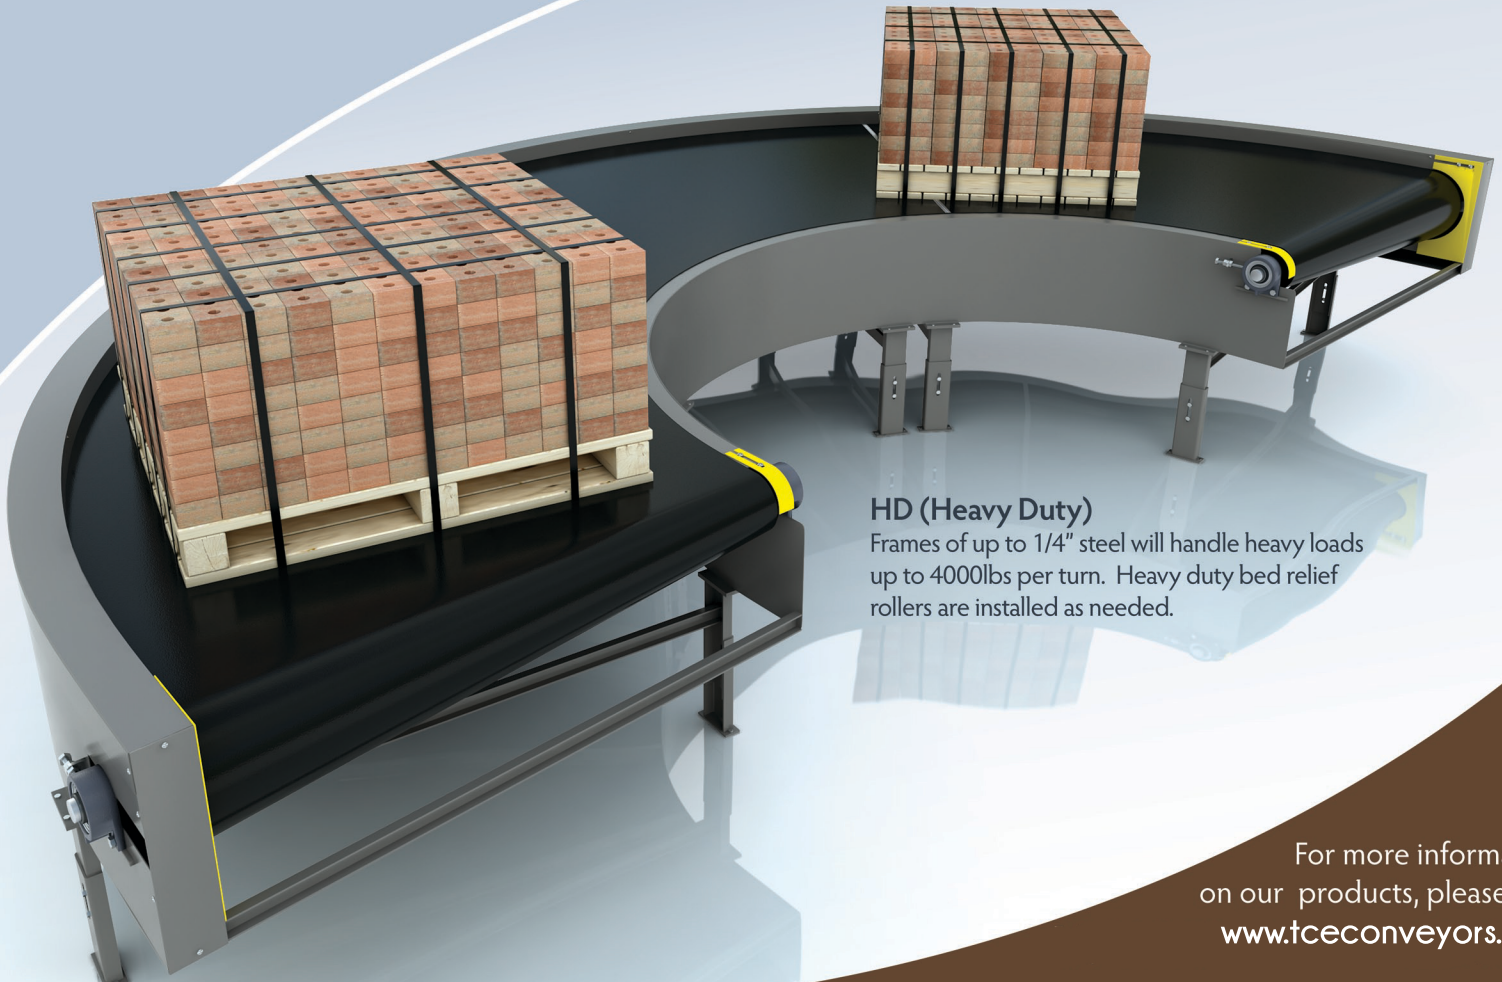

HD (Heavy Duty)

Frames of up to 1/4" steel will handle heavy loads up to 4000lbs per turn. Heavy duty bed relief rollers are installed as needed.

For more information on our products, please visit www.tceconveyors.com