


# PRODUCT DIVERTERS

## PNEUMATIC DIVERTERS

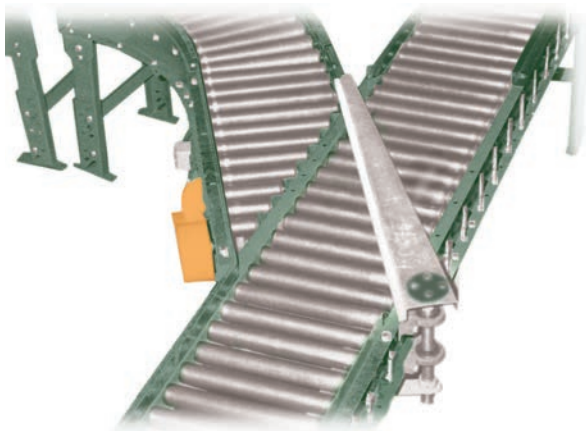

Pneumatic diverters are used to divert packages off main conveyor line onto spurs. This diverter may be utilized in powered or gravity conveyor applications. Conveyors shown are optional.

### SPECIFY MODEL NUMBER PER EXAMPLE

PD30-27-7-L

PD30-(between frames)-(frame size\* -(left or right\*\*))

\*Specify 3.5 or 7 for depth of frame.

\*\*Specify L for left hand; R for right hand.

### SPECIFICATIONS

DIVERSION ANGLE: 30°

DIVERTER ARM: 1/8" aluminum.

AIR CYLINDER: Double action with 6" stroke and cushioned. (60-80) PSI required.

SOLENOID VALVE: Single, 110 volt.

BEARINGS: Removable type, heavy duty ball bearing, with cast iron housings.

WEAR-STRIP: 1/4" UHMW wear-strip attached to face of diverter.

OPTIONAL: Double solenoid and electrical controls.

■ 3 week shipment