


# POWER ACCESSORIES

## TURNING WHEEL/TURNING POST ASSEMBLY

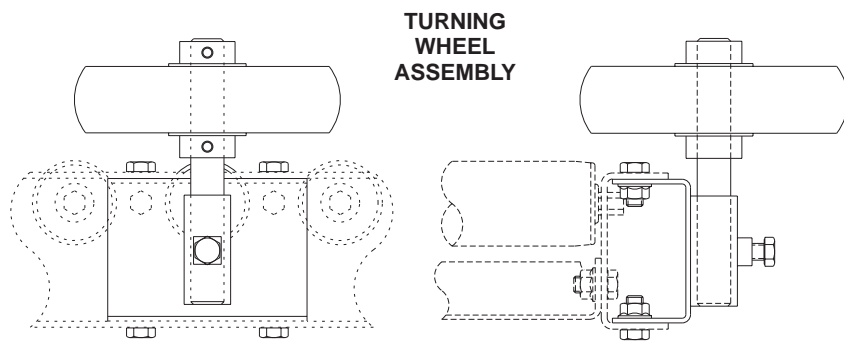

**TURNING  
WHEEL  
ASSEMBLY**

Turning wheel and turning post assemblies (turning post shown lower right) are commonly used in applications with converging or diverging spurs. These simple transition devices assist products with smooth transition to or from spur line.

### SPECIFICATIONS

TW: 6" dia. x 1-1/2" wide face rubber wheel with 3/4" dia. bore; shaft is 3/4" dia. w/ locking collar positioned above and below wheel. Shaft adjusts vertically up/down to accommodate product height.

TP: 196S roller (medium duty) or 251S roller (heavy duty), both 6" BF mounted in 7 ga. frame assembly.

**SPECIFY MODEL NUMBER PER EXAMPLE**


**TW-3.5**

T(wheel or post\*)-(frame depth or roller size\*\*)

\*Specify W for turning wheel or P for turning post.

\*\*For turning wheel specify frame size as 2.5, 3.5, 4.5 or 7. For turning post, indicate roller type as either 196 or 251.

NOTE: TW is 24 hour shipment; TP is 2 week shipment.

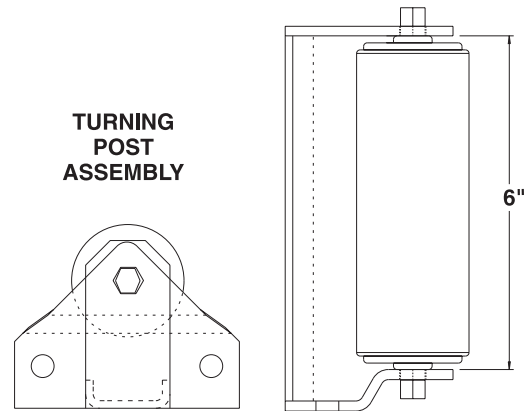

**TURNING  
POST  
ASSEMBLY**

■ 24 hour shipment ■ 2 week shipment