

844 220 0086



ROLLING SWING GATES FOR MEZZANINES

Wildeck's Rolling Swing Gates offer a trackless, cost-effective design that is base mounted onto mezzanine/deck surfaces.


These rolling gates are hinged to a vertical free-standing hinge post. The 8" wheel(s) allows a smooth inward opening motion up to approximately 180 degrees. The single gate models latch to the opposite vertical post with a gate latch. The double gate models are provided with a center cane bolt and gate latch to secure the gates in the closed position.

Highlights

- Single or double swing models available
- Hinge posts can be integrated with Wildeck's JiffyRail™
- Custom sizes available
- Designed in compliance with OSHA and CAL/OSHA requirements

STANDARD SPECIFICATIONS

- 1-1/2" Dia. Steel tube construction
- Provides 42" H guard rail protection with toe board
- Two (21" sphere test) or three (12" sphere test) rail options available
- Freestanding surface mounted
- Designation of left or right side opening needed (for single gate models only)
- Spring-loaded option available
- Wildeck yellow paint finish for high visibility (other colors available)
- Compatible with Wildeck's EdgeAlert™ Open Gate Alarm

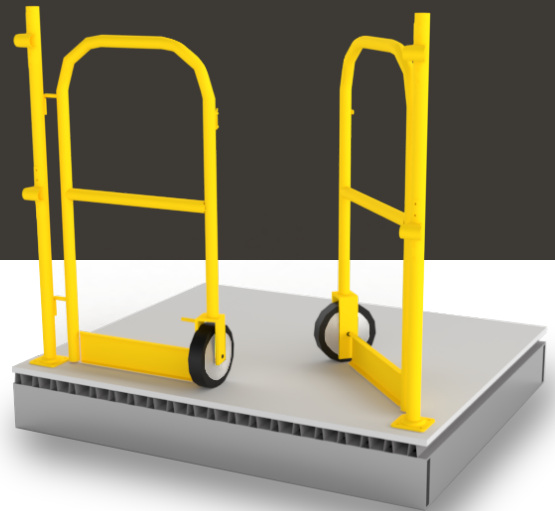

Wildeck® Rolling Double Swing Gate (SW-GD4)

Model #	Gate Width	Single / Double Gate	Shipping Weight
SW-GS3	3 ft.	Single	46 lbs.
SW-GS4	4 ft.	Single	49 lbs.
SW-GS5	5 ft.	Single	52 lbs.
SW-GS6	6 ft.	Single	55 lbs.
SW-GD3	3 ft.	Double	74 lbs.
SW-GD4	4 ft.	Double	78 lbs.
SW-GD5	5 ft.	Double	82 lbs.
SW-GD6	6 ft.	Double	86 lbs.
SW-GD7	7 ft.	Double	90 lbs.
SW-GD8	8 ft.	Double	94 lbs.
SW-GD9	9 ft.	Double	104 lbs.
SW-GD10	10 ft.	Double	108 lbs.
SW-GD12	12 ft.	Double	112 lbs.