



ELEVATE YOUR STANDARDS

STORING

SLIDE GATE




For Safe Mezzanine Material Handling

MECHANICAL SLIDE GATE

Wildeck mezzanine slide gates attach to the side of mezzanines with a standard clear opening of 6' - 0" and a required footprint of 14' - 9". Openings up to 8' - 0" wide are also available.

POWER SLIDE GATE

Wildeck's power slide gate can be operated by a remote control, by a stationary control button, or by a hanging pendant. The mechanical portion of the power slide gate ships fully assembled. Minor assembly is required for the electrical components. Mezzanine slide gates have a standard clear opening of 6' - 0" with option to 8' - 0" wide.

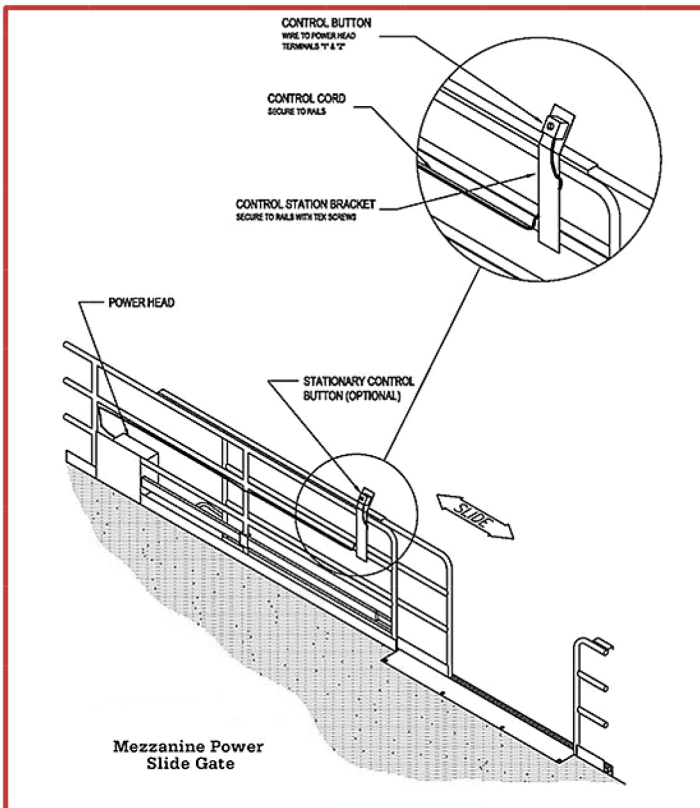

- ▶ The power slide gate can be equipped (optional feature) with a flashing warning light which will illuminate as soon as the gate begins to open.
- ▶ An audible alarm is also available that is activated when the gate opens.
- ▶ If the gate hits an obstacle while closing, it will automatically reverse. If the gate is restrained from opening, the motor will automatically shut-off.
- ▶ The power slide gate includes an emergency release lever that will disengage the gate panel from the motor mechanism. This release lever can be used in the event of a power failure to manually close the gate

STORING | LIFTING | GUARDING

Thomas Conveyor & Equipment Co. 1S450 Summit Avenue, Suite 175 Oakbrook Terrace IL 60181
844 220 0086 www.tceconveyors.com conveyors@tceconveyors.com